



OUTDOOR OPENINGS REMOTE CONTROL



THIS SENLAB D™ IS A SMART WIRELESS MODULE, FEATURING THE LORAWAN™ CONNECTIVITY PROTOCOL, EQUIPPED WITH A MAGNETIC DOOR SWITCH SET

Designed for outdoor use, this Senlab offers a ruggedized IP68 casing and robust wireless connectivity for continuous monitoring in harsh and challenging environments.

This Senlab offers the best in class features as:

- Battery Life time
- Rich data content
- Radio performances
- Advanced set of functionalities

TYPICAL APPLICATIONS

- Opening monitoring
- Activity-based services
- Cold chain management

TECHNICAL SPECIFICATIONS

Physical specifications	Physical dimensions	56 x 102 x 35 mm
	Weight	140 gr
	Operating temperature	-20°C to +70°C
RF spécifications	RF sensitivity	-137 dBm
	RF power	+14 dBm (25 mW)
	Radio band	868 MHz
EC Conformity: Compliant with Directive 2014/53/UE (RED)	EMC	Final draft EN 301 489-3 v2.1.1 Draft EN 301 489-1 v2.2.0
	Radio	EN 300 220-2 v3.1.1
	Magnetic field exposure	EN 62479
	Safety	IEC 60950-1, EN 60950-22



20 years *



15 km *




IP68
(Outdoor use)



Local or Public
Network compliant

DIMENSIONAL DRAWING

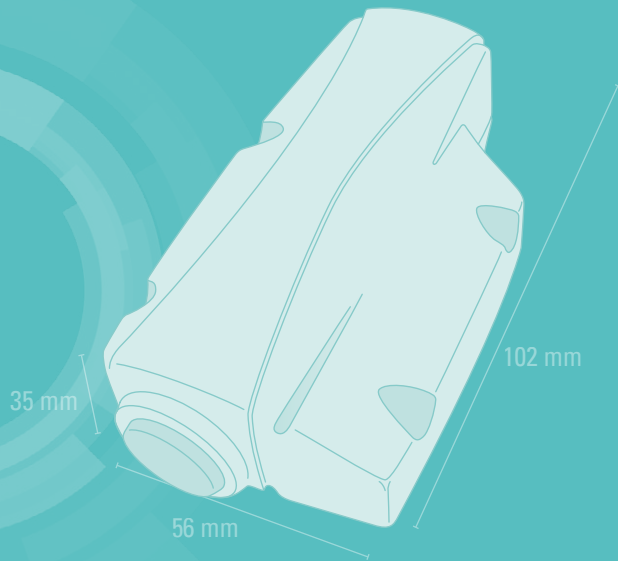

TECHNICAL FEATURES FOCUS

Plug & Play installation

- Double sided tape or screw mounting of door contacts (provided)
- Door contact detection up to 3 cm
- Activation with magnet (LED feedback)

High configurability of event detection and transmission

- Event notification of open and/or close state
- State detection duration configurable
- Immediate transmission or after N events or after maximum duration
- Reconfiguration possible over the air

Network configuration

- LoRaWAN parameters (OTAA or ABP activation mode, initial datarate,...)
- Encryption keys customizable by client
- Standard LoRaWAN retries support
- Radio collisions avoidance by pseudo-randomization of transmissions
- Advanced transmission reliability mechanisms (recovery of lost messages...)

BATTERY LIFE DURATION ESTIMATION

This following matrix provides the estimated battery lifetime depending on the average Spreading factor used by the Senlab and the transmission period.

Battery life (years)	10mn	15mn	30mn	1h	2h	4h	6h	8h	12h	24h
SF7	16,8	18,5	>20	>20	>20	>20	>20	>20	>20	>20
SF8	14,1	16,2	19,1	>20	>20	>20	>20	>20	>20	>20
SF9	10,5	12,8	16,5	19,3	>20	>20	>20	>20	>20	>20
SF10	7,1	9,2	13,2	16,8	19,5	>20	>20	>20	>20	>20
SF11	4,4	6,1	9,6	13,6	17,2	19,7	>20	>20	>20	>20
SF12	2,6	3,7	6,4	10,0	14,0	17,4	19,0	19,9	>20	>20